Installation Instructions

CP-CON-BLK-N4 or CP-CON-SS-N4X

Cover Plate with Conduit Cable Exit

IMPORTANT!

FOLLOW THESE INSTRUCTIONS CAREFULLY IN ORDER TO GET A WATERTIGHT NEMA 12/4/4X SEAL. FAILURE TO FOLLOW THESE INSTRUCTIONS COULD VOID THE WARRANTY IF WATER DAMAGE OCCURS.

INSTALL IN COMPLIANCE WITH ALL APPLICABLE LOCAL ELECTRICAL CODES.

1. Connect all cables to the monitor. Secure cables by completely turning all strain relief screw locks. Use the USB strain relief clip to secure USB cables.

   NOTE: Cables for the CP-CON series cover plates are shipped already installed in the conduit.

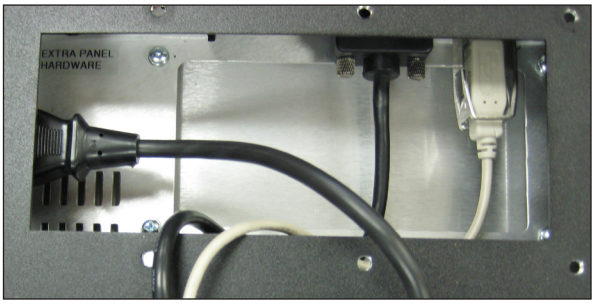

2. Position the cover plate on the rear cover with ***Conduit Elbow*** pointing towards the center of the monitor.

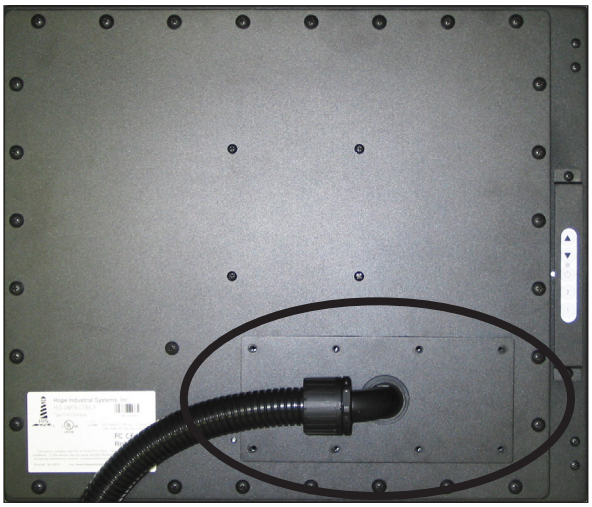

3. Install the provided eight sealing screws and tighten evenly until the gasket on the cover plate is 1/16" to 3/32" thick.

4. Other cable end must be installed in an equipment enclosure suitably rated for its environment. The hole for the conduit elbow should be 28 mm (1-3/32") diameter.

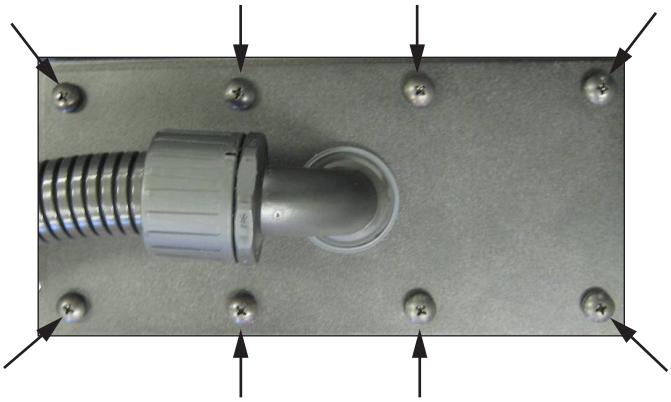

Your conduit comes fully assembled. If you should need to disassemble your conduit, follow these instructions.

Removal Instructions

1. Firmly hold the elbow twist grip with one hand.
2. Insert a slotted screwdriver into the slot on the elbow twist grip and twist the elbow twist grip to the "OFF" position.
3. Pull the conduit out from the elbow.

Assembly Instructions

1. Ensure the slot on the elbow twist grip is in the "ON" position.

2. Firmly insert the conduit with seal over end into the elbow.

   NOTE: There should be approximately one inch of conduit inside the elbow when inserted correctly.